



Litho EVO

Holmium Laser System





Litho EVO

35W HOLMIUM:YAG FOR ADVANCED LITHOTRIPSY

The new **Litho EVO** device represents the evolution of Quanta System low power **Holmium** line (*Litho*), improving the performances of its predecessors and adding some of the innovations recently introduced with our high power Holmium line.

Litho EVO is designed for enhanced versatility in **lithotripsy** and **soft tissue surgery**. The user has the possibility to be guided in the selection of emission parameters, to switch immediately between different settings thanks to the **double footswitch** and to save his favourite settings.

The use of the **MasterPULSE™** and **Vapor Tunnel™** technologies further empowers the surgeon with advanced treatment tools.



General Overview

- ✓ Effective Lithotripsy
- ✓ Vapor Tunnel™ Technology
- ✓ High Power and Frequency also with Small Fibers
- ✓ MasterPULSE™
- ✓ Reduced Depth of Penetration (0.3-0.4 mm)
- ✓ Soft Tissue Surgery
- ✓ Quick ROI
- ✓ High Versatility





Reclinable Display

RFID Recognition System

Fiber Connection


Proximity Sensor for Automatic Aperture

Frontal Footswitch Connection

- **Fiber Diameter**
200-1000 μm
- **Frequency**
Up to 30 Hz
- **Energy**
Up to 5 J
- **Power**
Up to 35 W
- **Pilot Laser**
Adjustable


Easy to Move

DOUBLE FOOTSWITCH

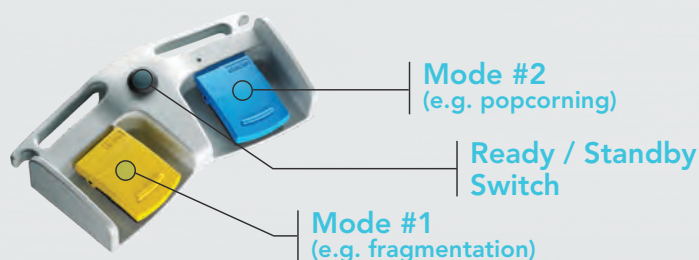


The double footswitch enables **immediate** switch from one emission mode to another, with **complete customization** of pedal-mode association. No bothersome interruptions are needed for settings readjustment.

Fragmentation



**SHORT
PULSE**

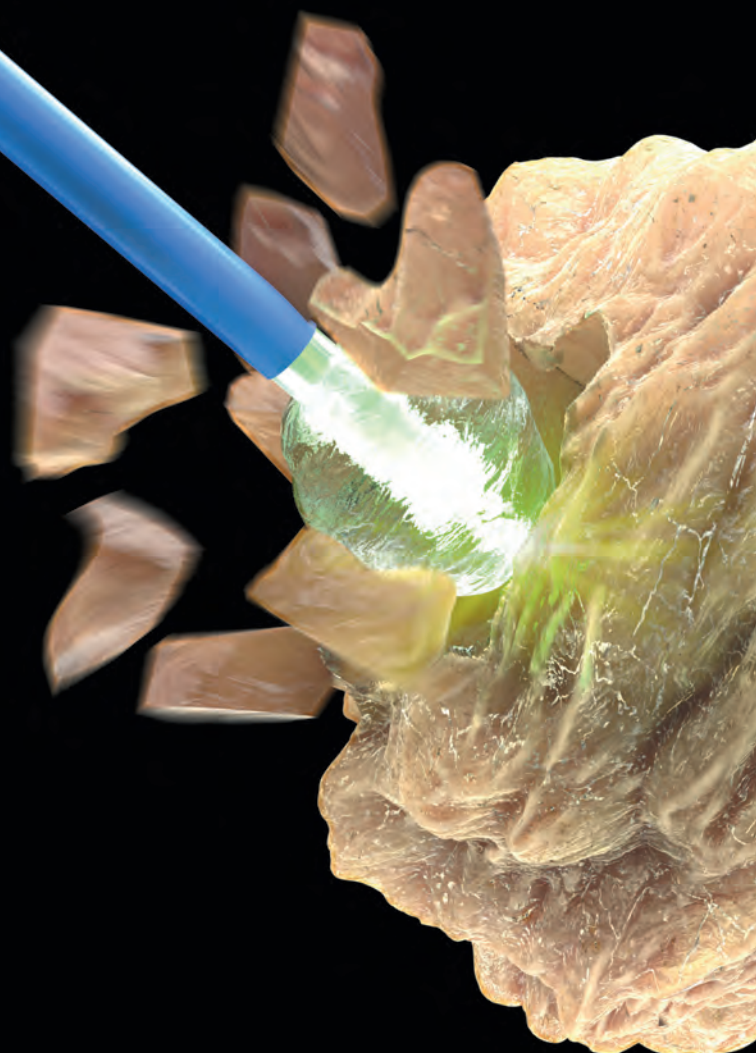

HIGH PULSE ENERGY

Up to 5 J, for superior pulse energy range



TREAT ALSO THE HARDEST STONES

Greater pulse energy allows to break harder stones



COLLECTION BASKET NEEDED

Retrieve stone pieces upon fragmentation



Dusting Effect

Vapor Tunnel™

LONG PULSE WIDTH

Up to 1100 μ s, for smooth ablation



LIMITED RETROPULSION

Easy ablation with no need to chase stone



NO NEED FOR BASKET

The obtained fine dust obviates the retrieval phase



Beyond standard low power Holmium

DOUBLE
FOOTSWITCH



HIGH PERFORMANCES
EVEN WITH SMALL FIBERS




SAVING OF
SETTINGS



MASTERPULSE
(7 steps pulse duration
adjustment)



GUIDE SETTINGS SELECTION
(not only for urology)

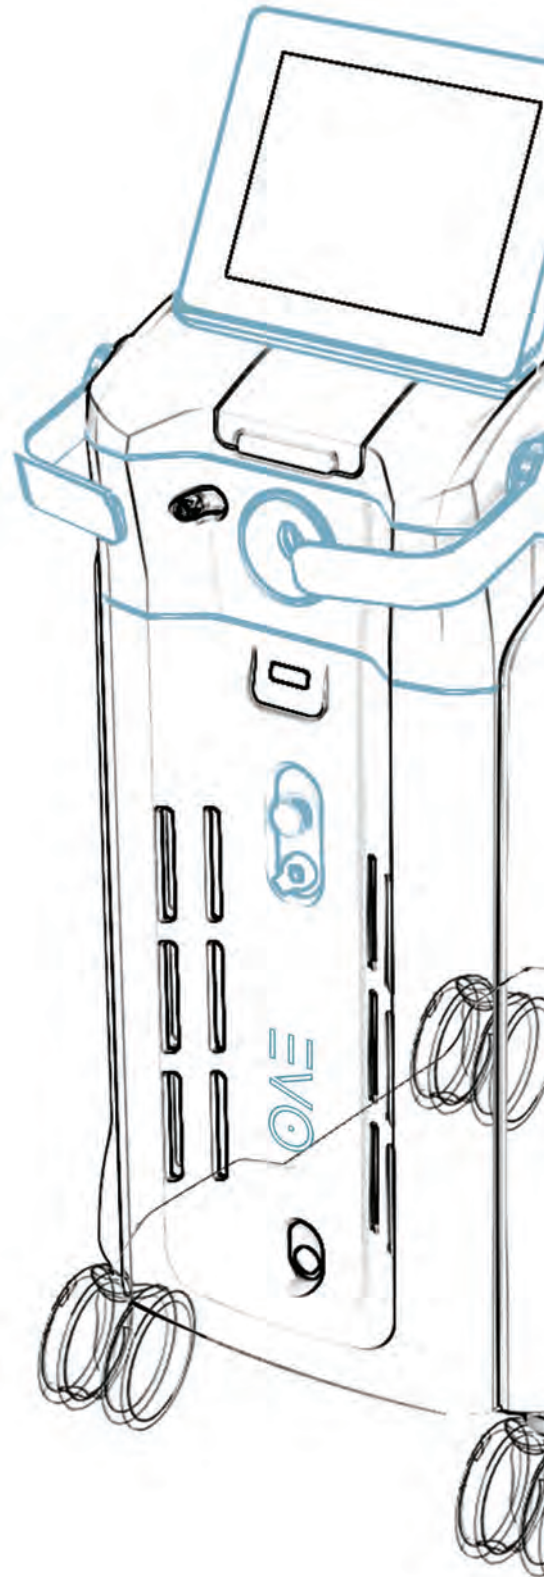

Reliability

Litho EVO embraces the successful legacy of its predecessor Litho 30 - 35 W, which has collected these numbers so far:

1000+

INSTALLATIONS WORLDWIDE

25+

COUNTRIES WHERE INSTALLED

200+

DOCTORS TRAINED AT
OUR REFERENCE CENTERS


2008

INTRODUCTION OF
THE FIRST LITHO MODEL



Fibers

Litho EVO device can be operated with a large range of fibers, depending on the application, flexibility and settings required.

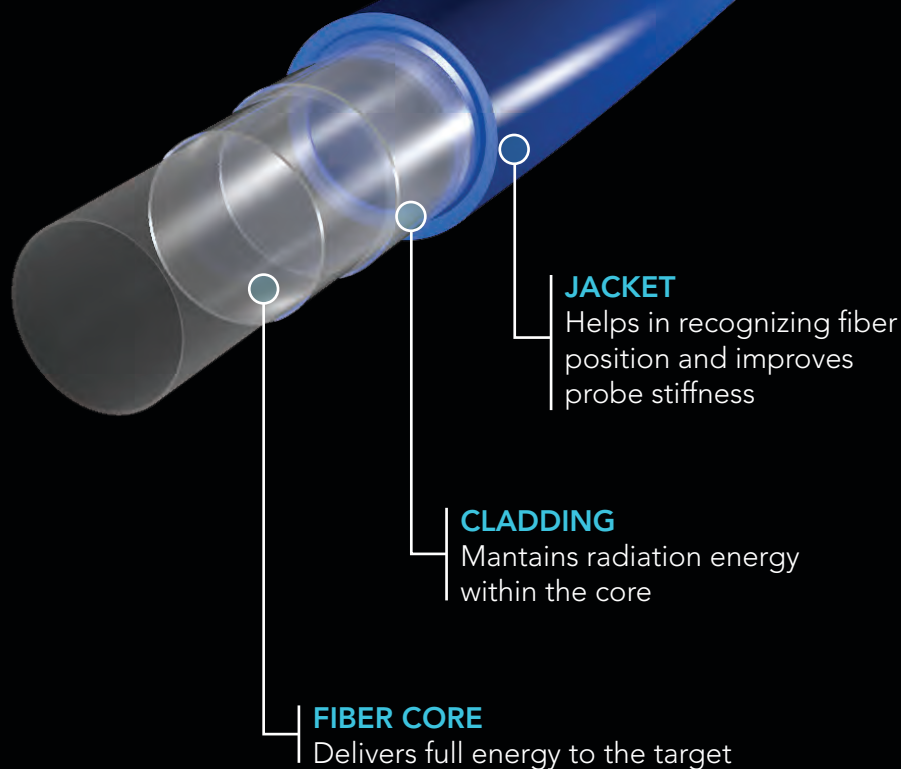

STANDARD FIBERS

For general use in stone and soft tissue treatments.
High power emission already with small fibers!




BALL TIP FIBERS

Strongly simplify the insertion in already bent scopes



GASTRO FIBERS

Specifically designed for the fragmentation of gallstones

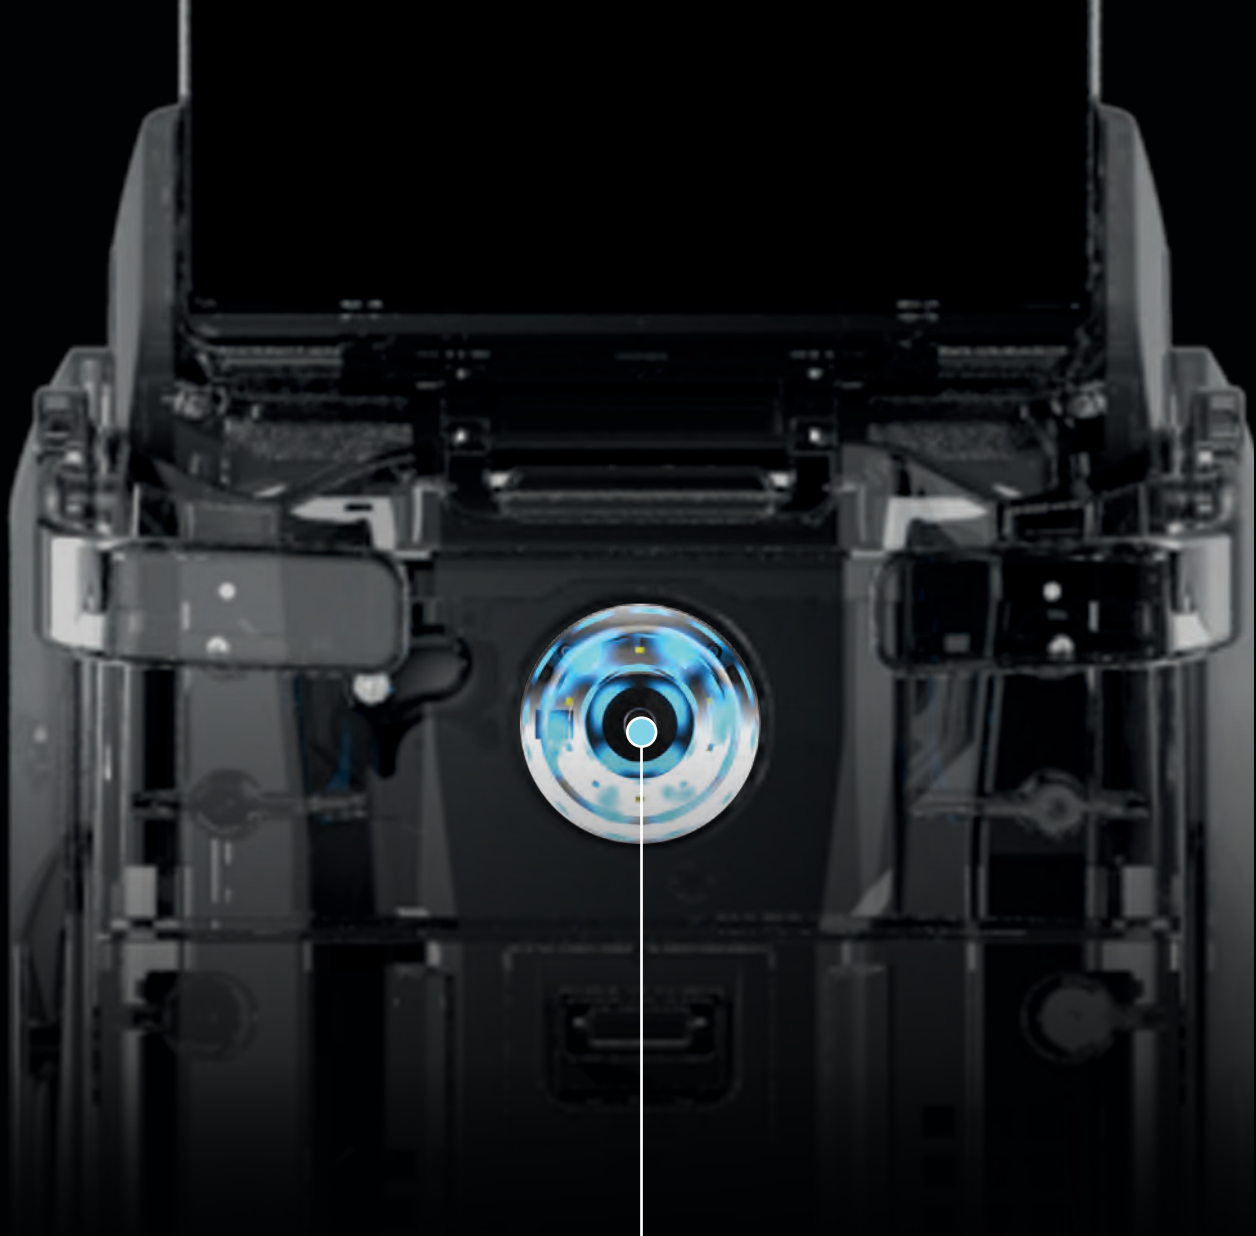

FIBER RECOGNITION

Litho EVO automatically adjusts emission settings based on the connected fiber diameter



AVAILABLE DIAMETERS

200, 272, 365, 550, 800
and 1000 μm



REUSABILITY

All fibers are available
both as disposable
and reusable (except
Ball Tip model)



CLEANING

Reusable fibers
can be sterilized by
Sterrads[®] and steam
sterilization




STERILIZATION TRAY

A dedicated fiber and
tool sterilization tray is
available

Applications

Litho EVO can be used to perform incision, excision, resection, ablation, vaporization, coagulation and hemostasis of soft tissue and in lithotripsy of stones in various medical specialties, including:

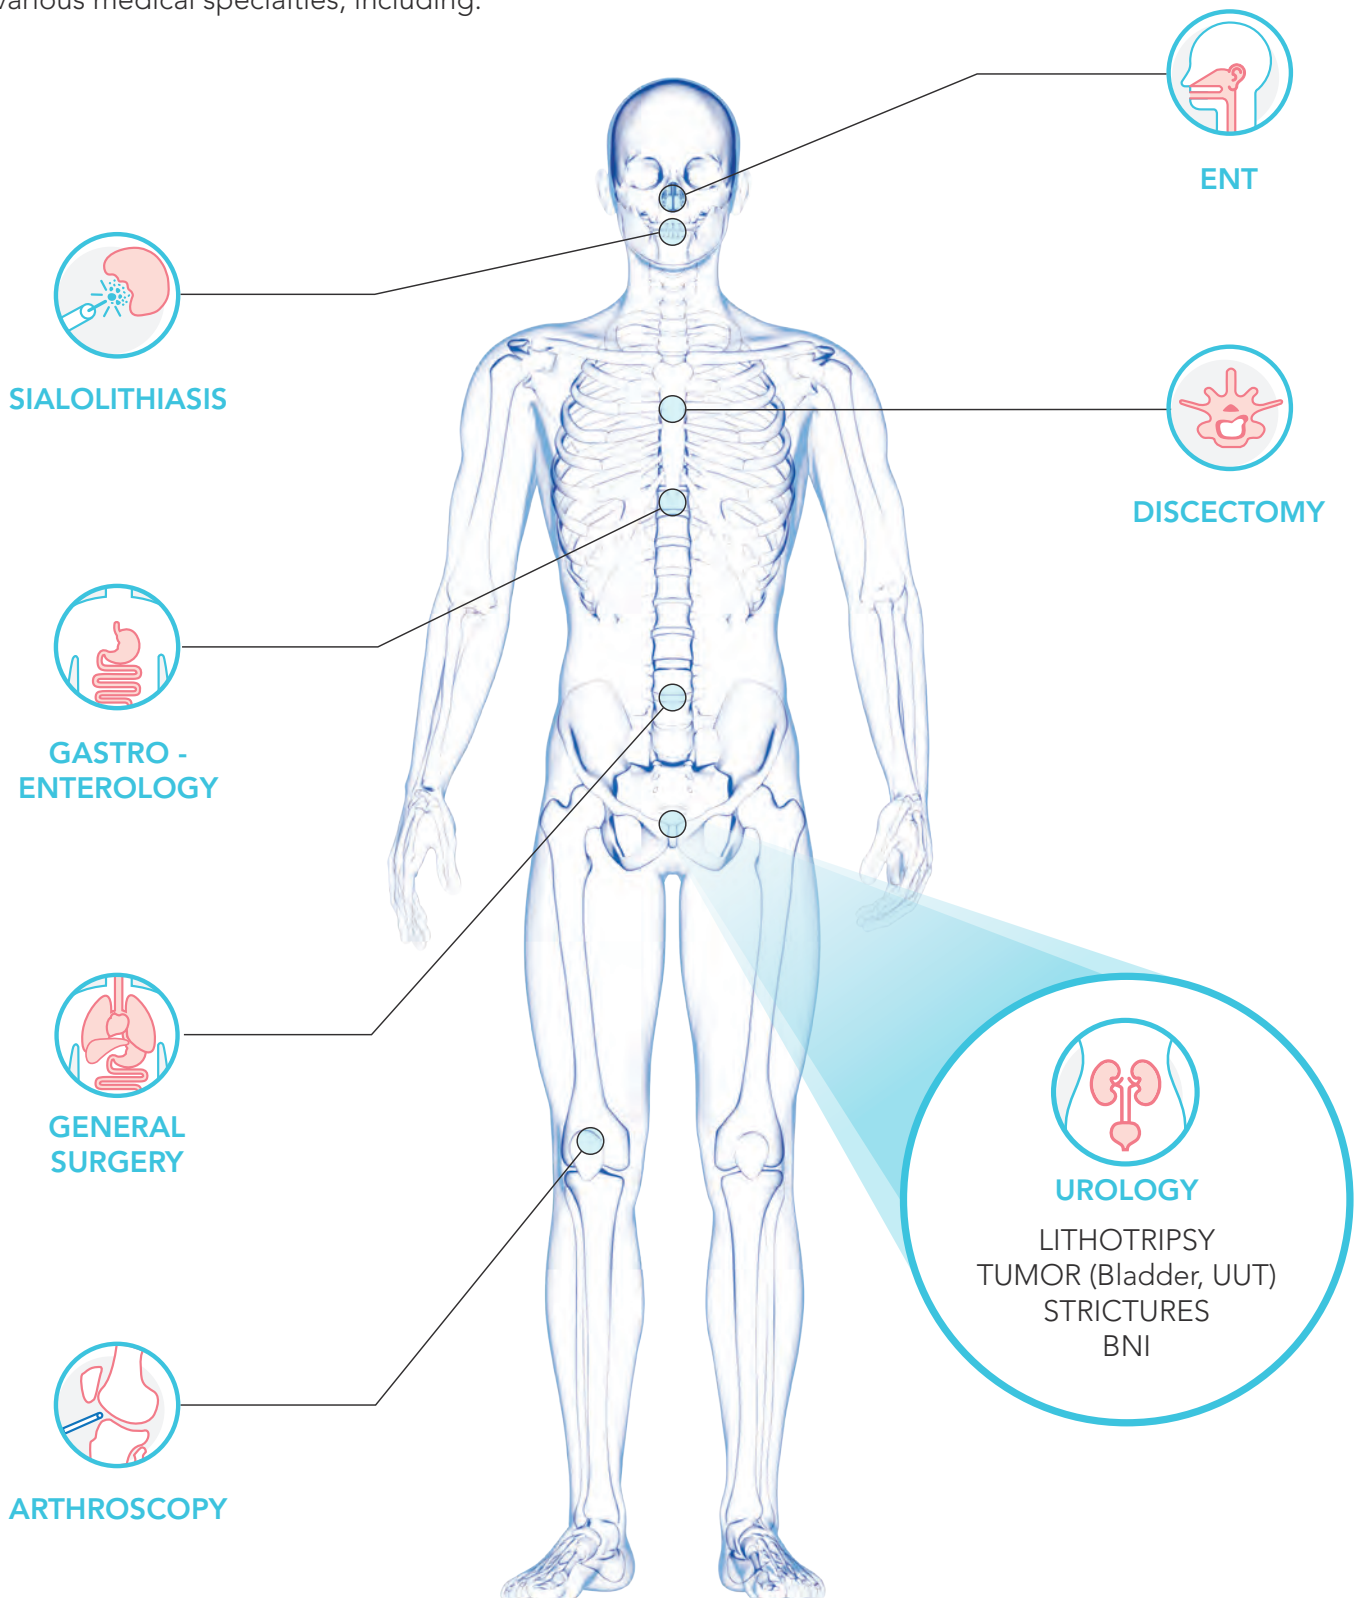

Technical Specifications

Average power	35 W
Repetition rate	3 ÷ 30 Hz
Energy per pulse	0,1 ÷ 5 J
Wavelength	2,1 µm
Pulse duration	50 ÷ 1100 µs
Beam delivery	Wide range of flexible silica fibers
Recognition fiber	RFID System
Activation	Double Footswitch
Aiming beam	532 nm, (adjustable <5mW) - Class 3R
Electrical requirements	220-230 Vac; 10 A; 50/60 Hz 100/115 Vac; 20 A; 50/60 Hz
Cooling	Closed water-air cooling circuit
Operating temperature	10°C ÷ 30°C
Dimensions and weight	45 cm (W) x 70 cm (D) x 92 cm (H) (display closed) - 95 kg

VISIBLE AND INVISIBLE LASER RADIATION

Avoid eye skin exposure to direct or scattered radiation

Laser product: Class 4

Aiming beam: Class 3R



CE
0123

Note: National local authorities may put restrictions to the parameters indicated in the above table, or may limit or remove certain intended uses. Specifications are subject to change without notice.

Quanta System products are manufactured according to the International standards and have been cleared by the most important International notified bodies.

The Company is UNI EN ISO 9001:2015 and EN ISO 13485:2016 certified. Quanta System S.p.A. was founded in 1985 and belongs to the El. En. Group (a public company listed in the Star segment of the Italian Stock Exchange) since January 2004.

The company, divided into three business units (medical, scientific and industrial) is specialized in manufacturing of laser and opto-electronic devices.

Quanta System
LASER IN OUR DNA

